

How to Add Access Control Devices to SmartPSS

Equipment Model	Firmware	Course Version	Date
DH-ASC1204B-S	General_ASC1204B_MCU_V1.103.0000.0.R.20170527	V1.0	2017/10/30
ASR1102A(V2)	General_ASR1102A_MCU_V2.003.0000.0.R.20170421		
ASR1102A-D(V2)	General_ASR1102A-D_MCU_V2.003.0000.0.R.20170421		
SmartPSS	V 2.01.0		

Login Client



After device initialization complete, enter username and login password.

Double click  to open the software.



① Set parameter, Enter username and password.

② Click "Login".

Note:


If it is the first time login, the system will show wizard of user to introduce new function and features.

Add Devices

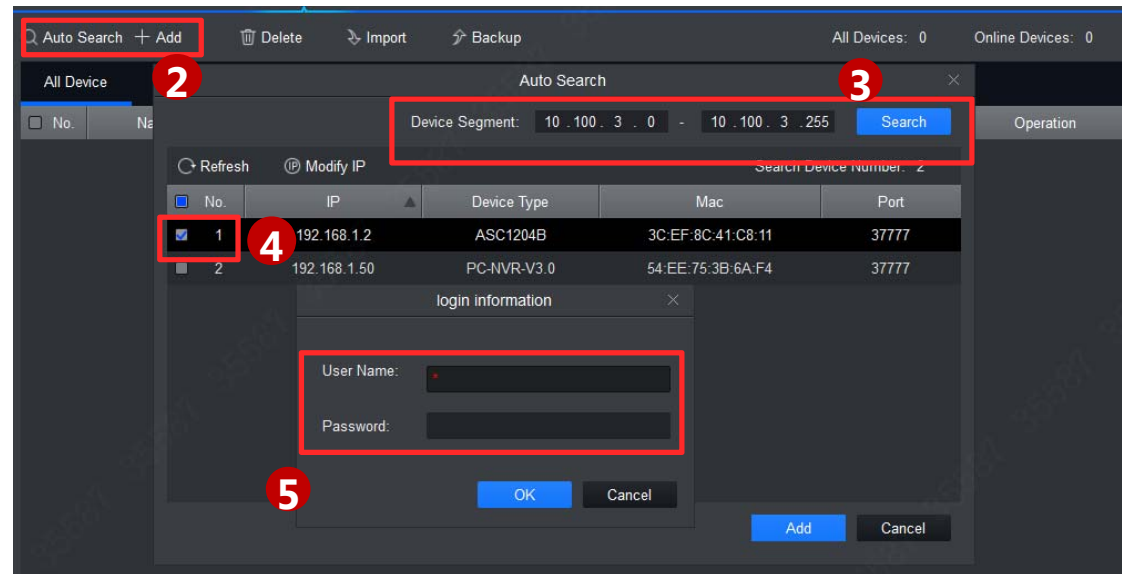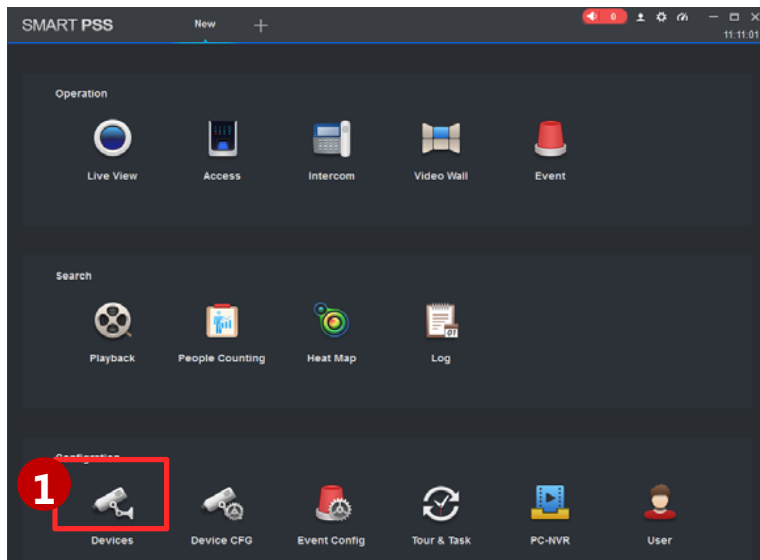


- ① Click 'Device'
- ② Click Auto Search (You can also click '+Add' to add single device)
- ③ Input the device segment
- ④ Select the devices you want to add
- ⑤ Enter User Name and Password (Which you use to login), Click 'OK'


Activate Statue

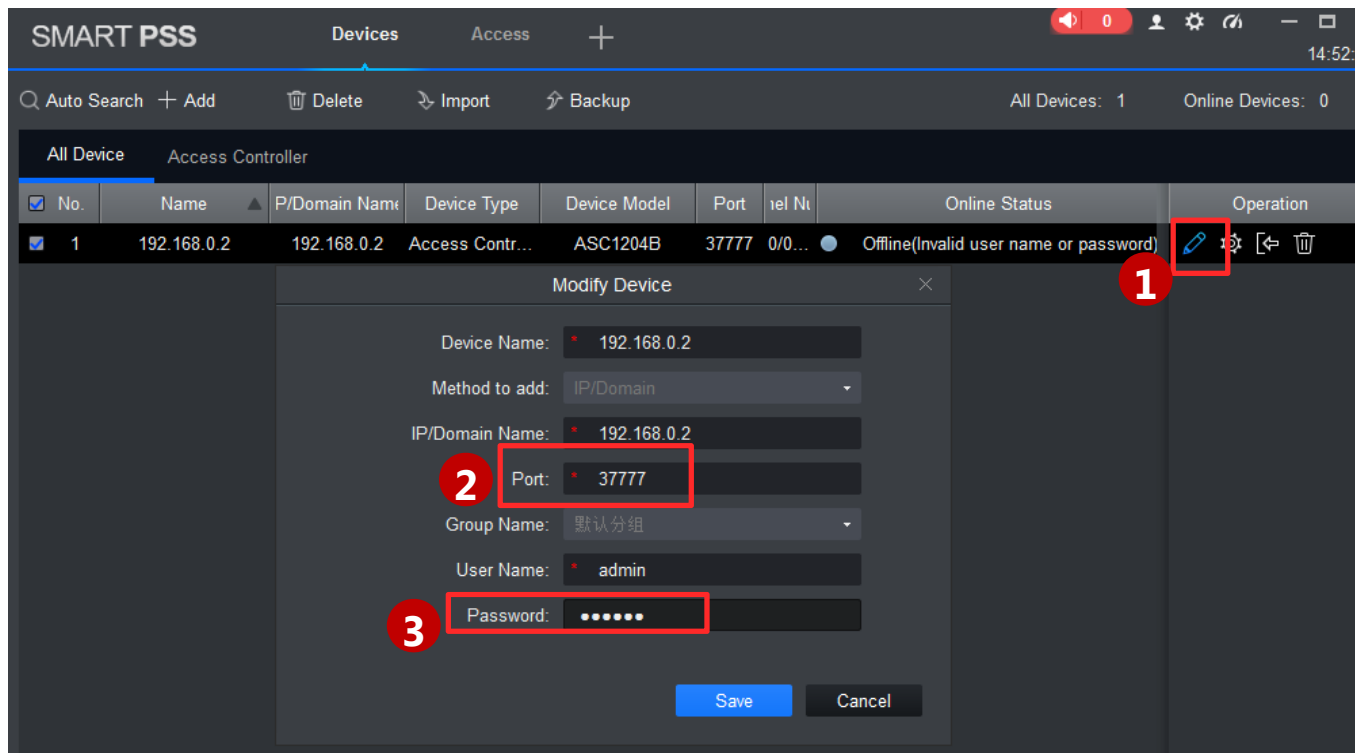


If the Status is offline:

- ① Click the 
- ② Set the Port number to 37777
- ③ Enter the Password: admin (by default, if the device is a standalone)/123456 (by default, if the device is a multi-door controller)

Access Control Interface

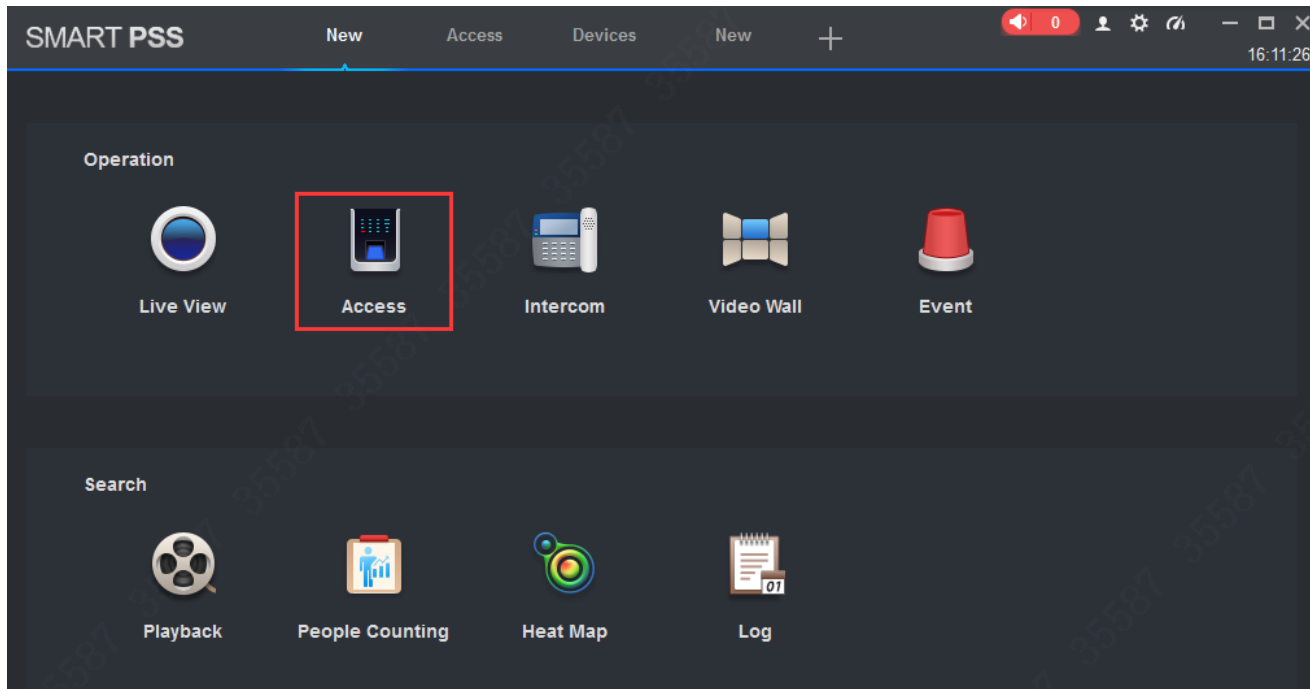

After successfully added in the device, go to the home page and click  , all settings about access control will be done in this interface.

THANK YOU