



# Dahua Access Control & Temperature Monitoring Terminal

Temperature Monitoring / Face Recognition



Temperature Monitoring  
Distance: 0.3m-1.8m



Temperature Accuracy:  
 $\pm 0.5^{\circ}\text{C}$





Temperature Monitoring  
Speed: 0.2s



Easy Install and  
Easy Move

## Key Features

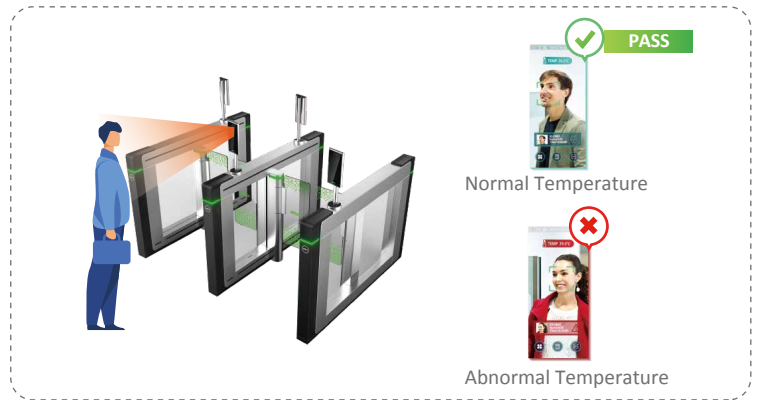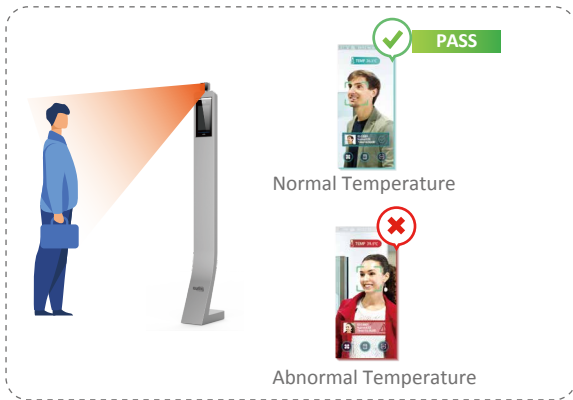


- Accurate monitoring of temperature, abnormal temperature alarm.
- Non-contact access to reduce cross-infection.
- Easy to install, easy to move.
- Large storage of face images and temperature information for easy back-tracking.
- Fast access to prevent congestion.

## Application Scenarios



Commercial Building

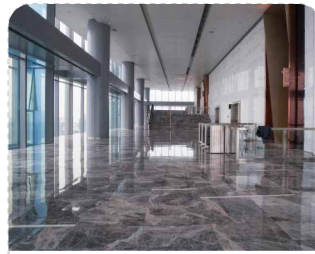

Office Building



School



Factory

## Products Selection



- DHI-ASI7213X-T1**  
(DSS-EXPRESS OR NVR Optional)
- Temperature Monitoring Accuracy:  $\pm 0.5^{\circ}\text{C}$
  - Temperature Monitoring Distance: 0.3m ~ 1.8m
  - Sound Prompt: Abnormal temperature alarm



- DHI-ASI7223X-A-T1**  
(DSS-EXPRESS OR NVR Optional)
- Temperature Monitoring Accuracy:  $\pm 0.5^{\circ}\text{C}$
  - Temperature Monitoring Distance: 0.3m ~ 1.8m
  - Sound Prompt: Abnormal temperature alarm



- DHI-ASI7213X-T1+ASF172X-T1**  
(DSS-EXPRESS OR NVR Optional)
- Temperature Monitoring Accuracy:  $\pm 0.5^{\circ}\text{C}$
  - Temperature Monitoring Distance: 0.3m ~ 1.8m
  - Sound Prompt: Abnormal temperature alarm

\* Design and specifications are subject to change without notice.

Ver. 2, Apr. 2020

## DAHUA TECHNOLOGY

No.1199 Bin'an Road, Binjiang District, Hangzhou, China. 310053

Tel: +86-571-87688883 Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuasecurity.com

