

Dahua Access Control & Temperature Monitoring Terminal

Temperature Monitoring / Face Recognition



Temperature Monitoring
Distance: 0.3m-1.8m



Temperature Accuracy:
 $\pm 0.5^{\circ}\text{C}$





Temperature Monitoring
Speed: 0.35s




Easy Installation
And Mobility

Key Features

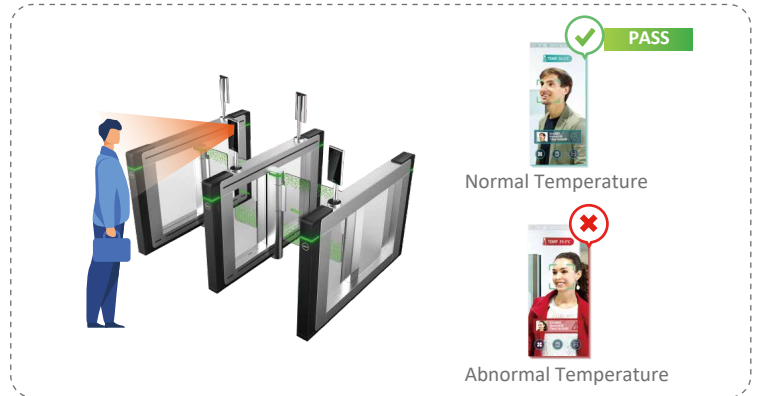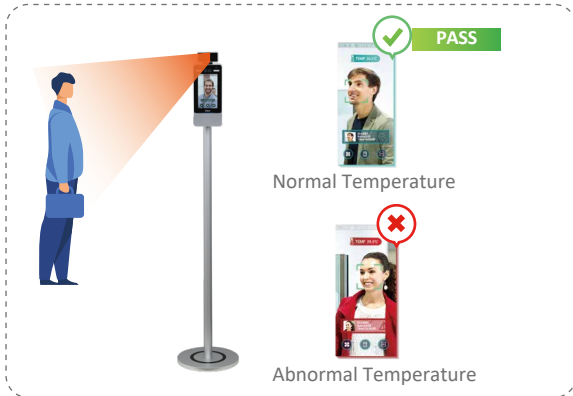

- Accurate monitoring of body temperature with an alarm function for abnormal temperature.
- Non-contact access to reduce cross-infection.
- Easy to install, easy to move.
- Large storage of face images and temperature information for easy back-tracking.
- Fast access to prevent congestion.


Application Scenarios



Office Entrance



Factory Entrance



Library Entrance



Store Entrance

Products Selection



DHI-ASI7213Y-V3-T1

- Temperature Monitoring Accuracy: $\pm 0.5^{\circ}\text{C}$
- Temperature Monitoring Distance: 0.3m ~ 1.8m
- Sound Prompt: Abnormal temperature alarm



Wall Mounting:
DHI-ASI7213Y-V3-T1



Turnstile Integrated Mounting:
DHI-ASI7223Y-A-V3-T1



Stand Mounting:
DHI-ASI7213Y-V3-T1
DHI-ASF172YV3-T1



DHI-VTH5341G-W
(Android Based)
DHI-VTH5421EW-H
(Linux Based)



NVR5XXX-I



DSS Express

* Design and specifications are subject to change without notice.

Ver. 1, Aug. 2020

DAHUA TECHNOLOGY

No.1199 Bin'an Road, Binjiang District, Hangzhou, China. 310053

Tel: +86-571-87688883 Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuasecurity.com

