

STOP

COVID-19

Dahua temperature monitor & face recognition terminal protect your company from virus

Part 1: Key Features



Contactless



High Accuracy



Temperature Alert

Part 2: Extension Function

Software
Management



Mask
Checking



Access Control &
time attendance

Part 3: Installation & Environment



Installation



Environment




Performance



Non-contact




Manual body temperature with close physical contact, **risk for cross-infection**

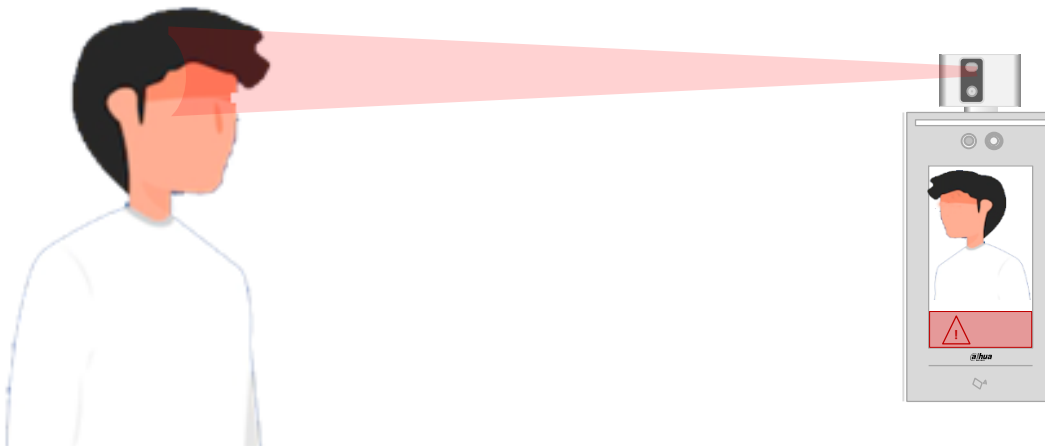


Our temperature monitor & face recognition terminal, **enabled non-contact fever scanning**, and accelerated its speed.



Non-Contact

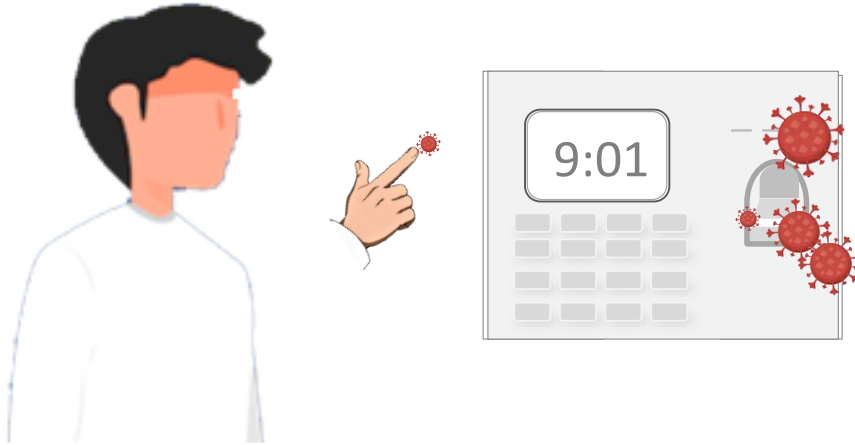



Traditional access control or attendance mode, **risk for cross-infection**

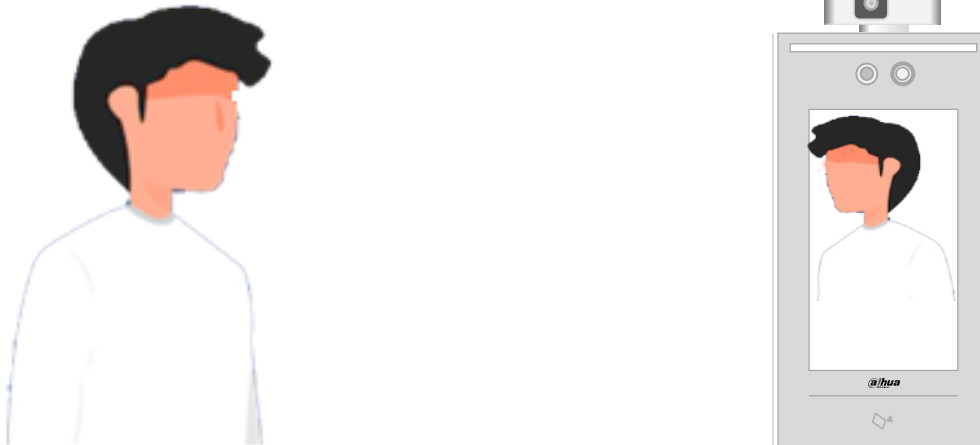

Our temperature monitor & face recognition terminal, **enabled non-contact access authorization and attendance check in**



High Accuracy

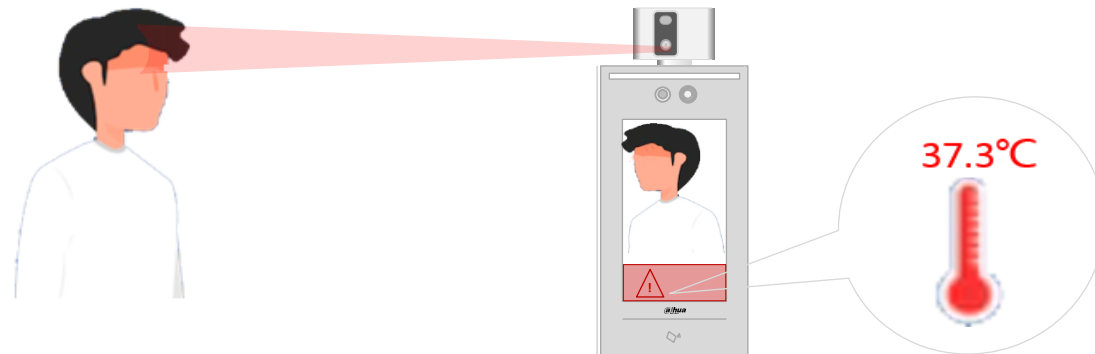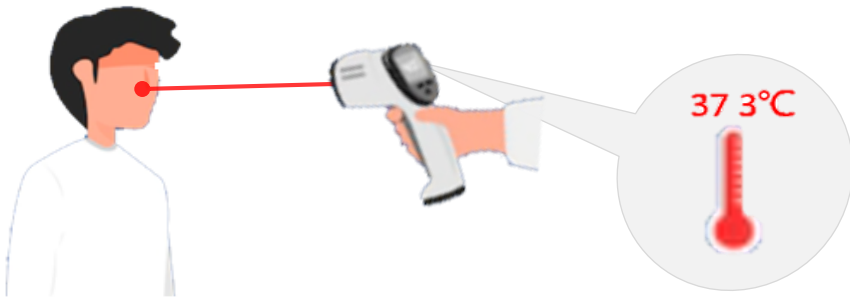


High Accuracy:

Based on the algorithm compensates and adjustment technology, ensure that the temperature measurement data of each time is kept within the error range of 0.5°C



Temperature Alert

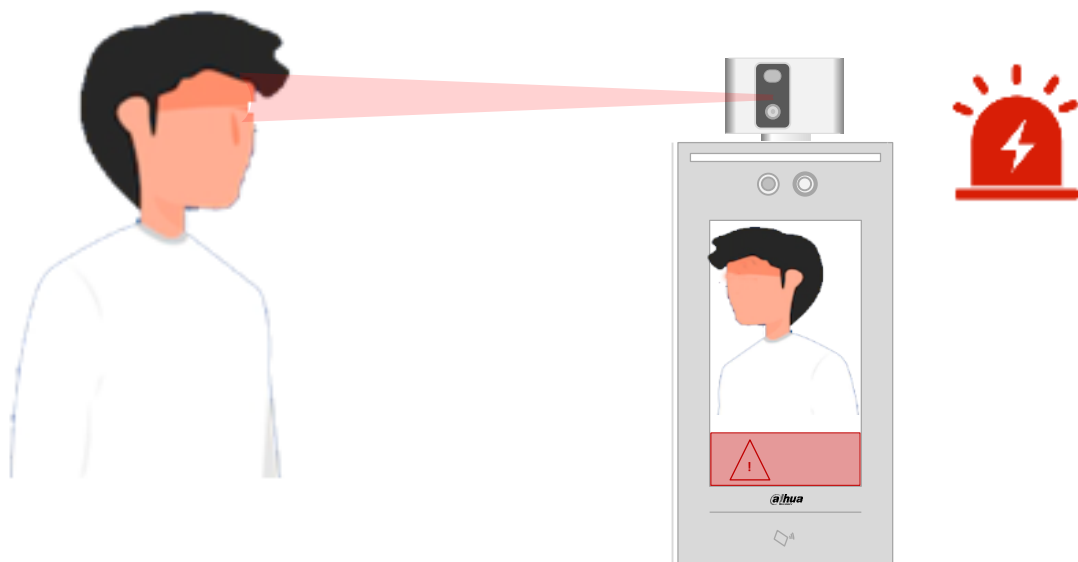


Abnormal Temperature Alert:

Visual and voice alert when abnormal temperature detected. Alarm info push to management software at the same time, once management platform connected.



Mask Detection

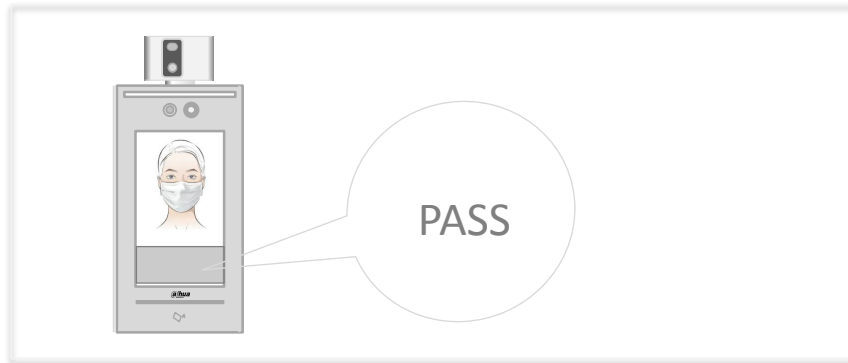




Mask Detection:

An optional function to detect the user wear mask or not.


Warning signal triggered once non-wearing mask detected.




Software management

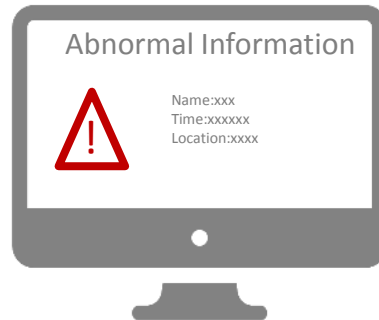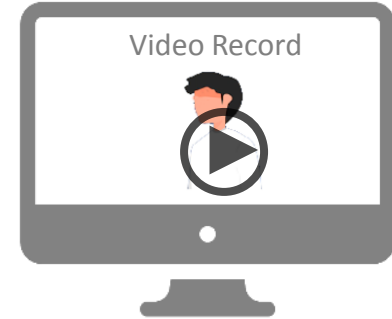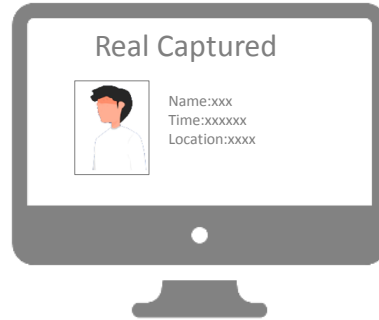

Access Control & Time Attendance

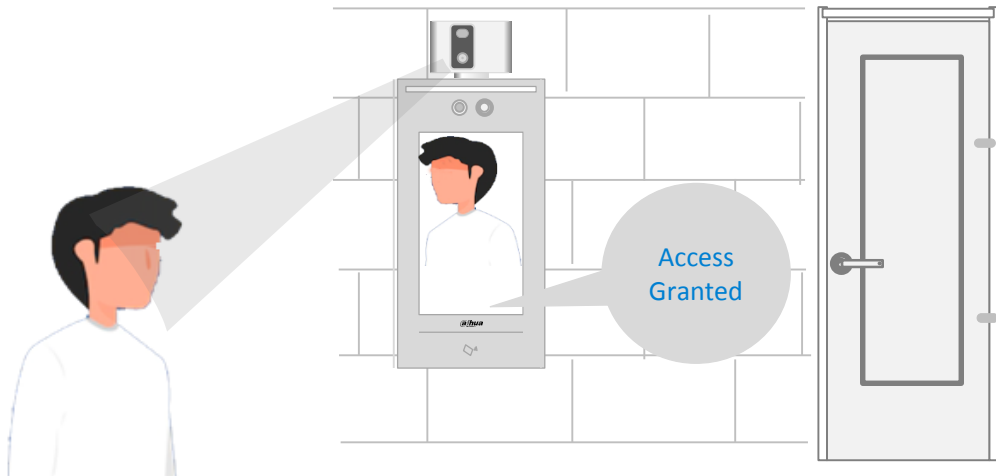


Access Control Management:
It integrates professional access control functions, which can support face or card authorization, and meet various access control management logic.

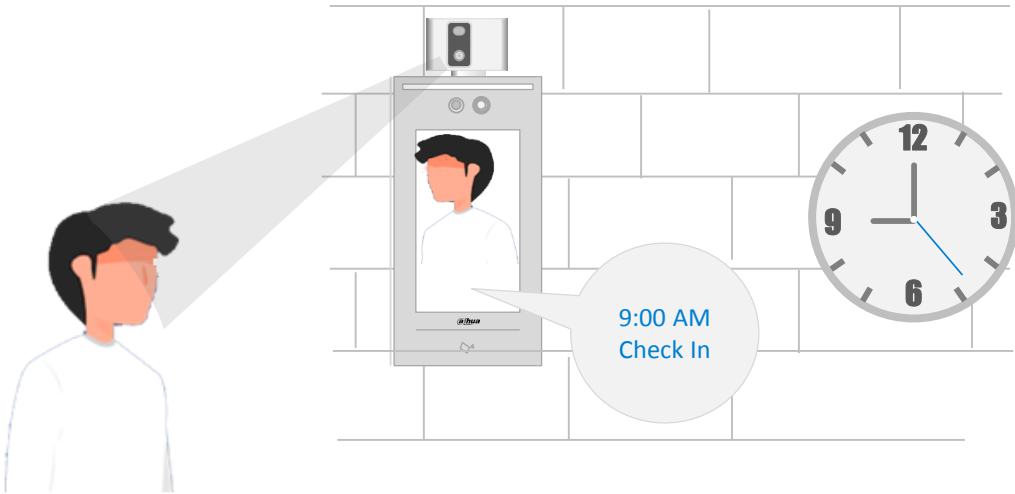


Access Control Management:
The terminal supports attendance management. Through the connection platform software, support attendance businesses such as schedule and shift setting, work hour statistics and overtime management.




Environment




Installation Point
Indoor

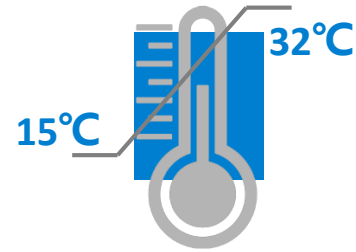

Environment Temperature
15°C~32°C

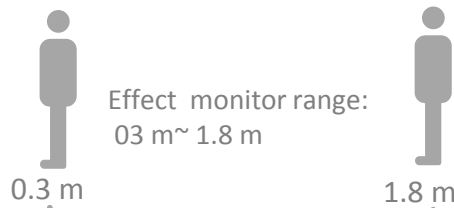



Effective Monitor Range
0.3m~1.8m



Power On for Warming up
Last 20 minutes




Installation

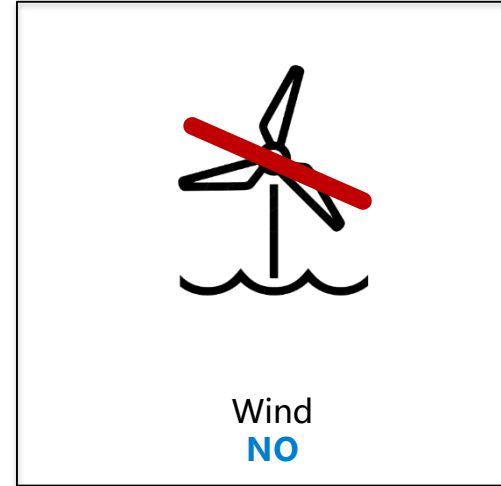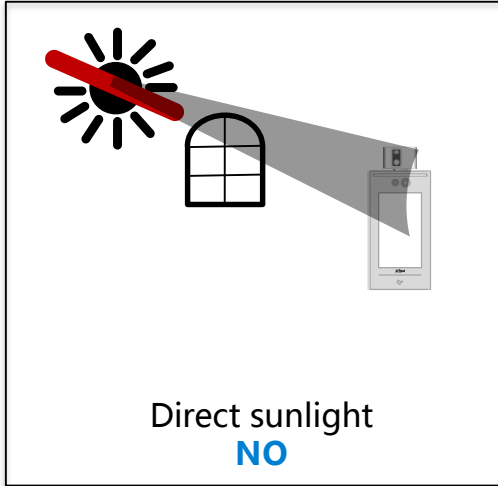





Mounting Method

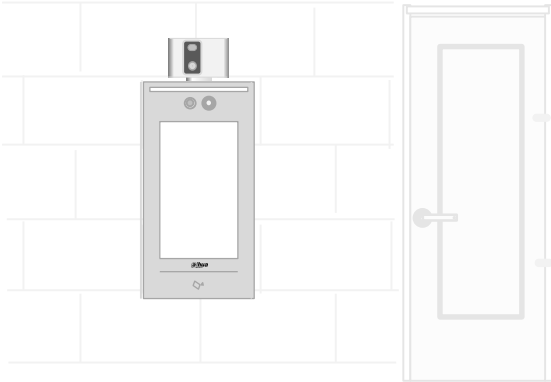


Wall Mounting

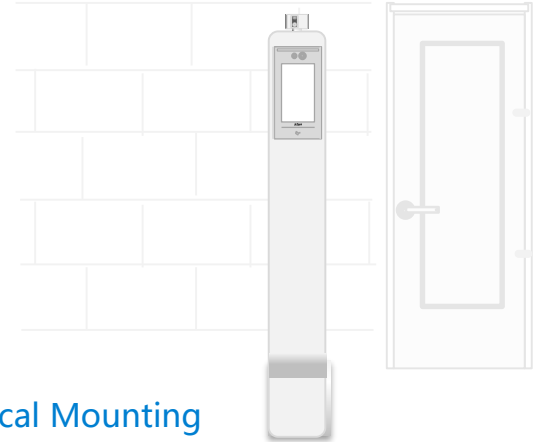

Vertical Mounting

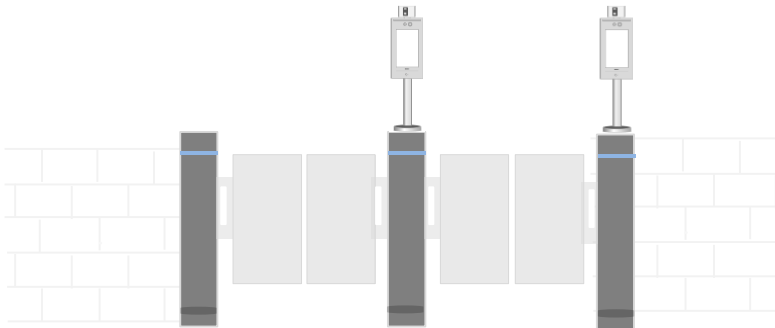

Turnstile Integrated Mounting

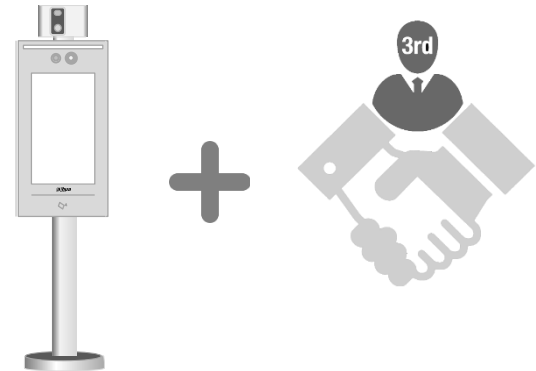

3rd Party Turnstile Mounting