



Volt V2.840.0000000.13.R.220110

Release Notes



Legal Information

Copyright

© 2022 ZHEJIANG DAHUA VISION TECHNOLOGY CO., LTD. All rights reserved.

This document cannot be copied, transferred, distributed, or saved in any form without the prior written permission of Zhejiang Dahua Vision Technology Co., LTD (hereinafter referred to as "Dahua").

The products described in this document may contain the software that belongs to Dahua or the third-party. Without the prior written approval of the corresponding company, any person cannot (including but not limited to) copy, distribute, amend, abstract, reverse compile, decode, reverse engineer, rent, transfer, sublicense the software.

Trademarks

 ,  ,  , and **HDCVI** are the trademarks or registered trademarks of Dahua.

All other company names and trademarks mentioned herein are the properties of their respective owners.

Disclaimer

- These release notes are for reference only. Slight differences might be found between the release notes and the product.
- Succeeding products and release notes are subject to change without notice.
- If there is any uncertainty or controversy, we reserve the right of final explanation.

Table of Contents

Legal Information.....	1
Release Notes	1
1.1 Overview	1
1.2 New Features	1
1.3 Fixed Bugs.....	2
1.4 New Features	2
1.4.1 Smart Illumination.....	2
1.4.2 Algorithm Optimization for Big-animal False Alarm Based on SMD Function	2
1.4.3 AI Codec	3
1.5 Compatibility	4
1.5.1 Program.....	4
1.5.2 Browser	4
1.5.3 Third-Party Access.....	4
1.6 Software Environment	4
1.7 Pending Issues.....	4
1.8 Update Guide	5

Release Notes

1.1 Overview

Item	Description
Product model	Volt platform series
Version	V2.840.0000000.13.R.220110
Software package information	DH_IPC-HX5XXX-Volt_MultiLang_PN_Stream3_V2.840.0000000.13.R.220110.zip DH_IPC-HX5XXX-Volt_MultiLang_NP_Stream3_V2.840.0000000.13.R.220110.zip DH_IPC-HX5XXX-Volt_MultiLang_NP_Stream3-USA_V2.840.0000000.13.R.220110.zip DH_IPC-HX5XXX-EMMC2-Volt_MultiLang_PN_Stream3_V2.840.0000000.13.R.220110.zip DH_IPC-HX5XXX-EMMC2-Volt_MultiLang_NP_Stream3_V2.840.0000000.13.R.220110.zip DH_IPC-HUM7XXX-E2-Volt_MultiLang_PN_V2.840.0000000.13.R.220110.zip DH_IPC-HUM7XXX-E2-Volt_MultiLang_NP_V2.840.0000000.13.R.220110.zip DH_IPC-HX5XXX-Volt_MultiLang_PN_Stream3_E2_V2.840.0000000.13.R.220110.zip DH_IPC-HX5XXX-Volt_MultiLang_NP_Stream3_E2_V2.840.0000000.13.R.220110.zip DH_IPC-HX5XXX-Volt_MultiLang_PN_Stream3_MCF_V2.840.0000000.13.R.220110.zip DH_IPC-HX5XXX-Volt_MultiLang_NP_Stream3_MCF_V2.840.0000000.13.R.220110.zip DH_IPC-HX5XXX-Volt_MultiLang_NP_Stream3-USA_MCF_V2.840.0000000.13.R.220110.zip
OS requirement	None
Release date	January 26, 2022

1.2 New Features

Feature	Description
Setting maximum resolution	For 8-MP cameras of HX5XXX model, the maximum resolution of snapshot can be set to 8 MP. It is 4 MP by default.
Setting brightness upper limit	Select Smart Illumination on the Fill Light drop-down list, select Auto on the Mode drop-down list, and then you can set the brightness upper limit of the white light.

1.3 Fixed Bugs

Fixed Bug	Description
1	The image effect is optimized when the red and blue lights flash at night.
2	In the smart illumination mode, human targets cannot trigger the automatic switch of the white light in some scenes.
3	DMSS cannot receive the event after the sound and light device is disarmed with one click.
4	IPv6 configuration is deleted after upgrading to a new program.

1.4 New Features

1.4.1 Smart Illumination

In the smart illumination mode, you can set the brightness upper limit of the white light.




1.4.2 Algorithm Optimization for Big-animal False Alarm Based on SMD Function

Through the optimization of the algorithm detection model, the SMD function is optimized for the released products, and the detection optimization is mainly for the large animal (such as cattle, horse, and sheep). The main optimization points are as follows:

The current SMD function only detects people and vehicles. Version 2.0 optimizes the false alarm of small animals, such as cats and dogs in the family. Version 3.0 optimizes the algorithm for large outdoor animals and trains massive animal data. If an animal trips the rule line, SMD will filter out the alarm triggered by animals and only keep the alarm triggered by people and vehicles.

The following false alarm will be filtered out:

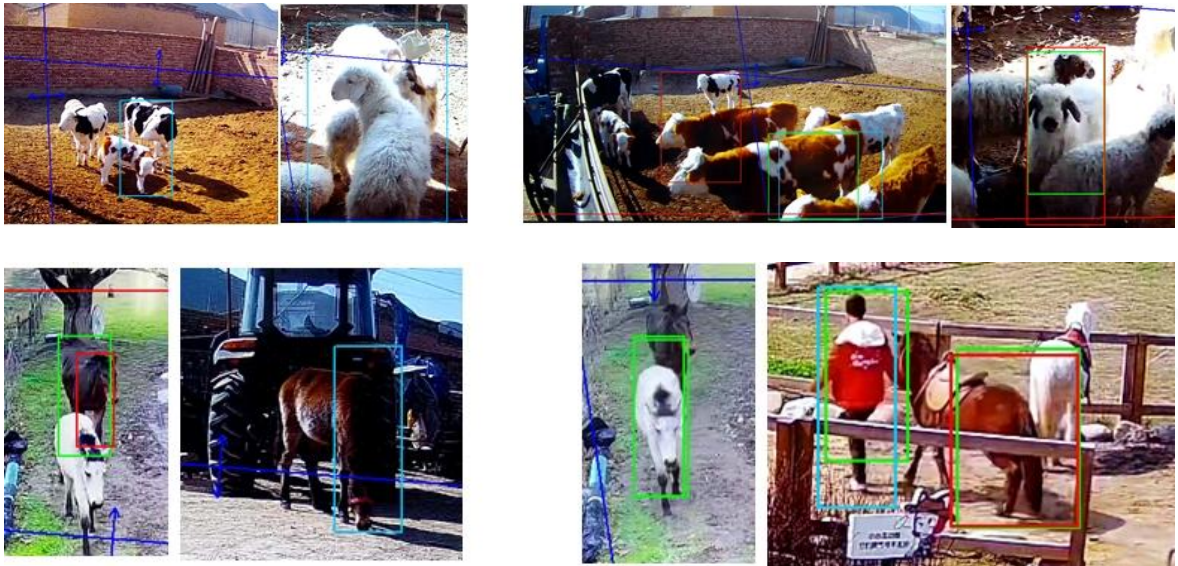

1.4.3 AI Codec

- AI codec mode is added to the main stream interface. You can select the encoding strategy as **General**, **Smart Codec**, and **AI Codec**.
- When selecting **AI Codec**, the bit rate type automatically switches to **CBR**, and the bit rate decreases by 25% compared to General mode.
- When selecting **AI Codec**, you can select frame rate as 1x or 2x under **I frame interval** list. It is 2x by default.
- The AI Codec mode is only added for devices with AI functions.

Video	Snapshot	Overlay	Path
Main Stream			
Encode Mode	H.265		
Encoding Strategy	AI Codec		
Resolution	3840*2160(3840x2160)		
Frame Rate(FPS)	20		
Bit Rate Type	CBR		
Reference Bit Rate	1441-8192Kb/S		
Bit Rate	Customized		
	3072	(3~8192) (Kb/S)	
I Frame Interval	40		
<input checked="" type="checkbox"/> Watermark Settings			
Watermark Character	DigitalCCTV		
Stream Smooth	[-] 0 [+]		
<div style="display: flex; justify-content: space-around;"> Default Refresh Save </div>			

1.5 Compatibility

1.5.1 Program

It is compatible with the previous release.

1.5.2 Browser

IE11\Firefox\Google

1.5.3 Third-Party Access

- CGI testing tool version: V2.91.1.1
- ONVIF testing tool version: V20.12
- ONVIF: Supports ProfileG, ProfileT, ProfileS

1.6 Software Environment

Platform	Model	Version
NVR	NVR5X-4KS2	DH_NVR5XXX-4KS2_MultiLang_V4.001.0000006.0.R.210208.zip
	NVR2X-I2	DH_NVR2XXX-I2_Mul_V4.001.0000000.0.R.210208.zip
	NVR4X-4KS2	DH_NVR4XXX-4KS2_MultiLang_V4.001.0000005.1.R.201126.zip
	NVR4X-I	DH_NVR4XXX-I_MultiLang_V4.001.0000000.3.R.201022.zip
Client	DMSS	ios: V1.92.000 android: V1.91.000
Tool	Player	General_SmartPlayer-Win32_Eng_IS_V4.001.0000001.0.R.200916.zip
	ConfigTool	General_ConfigTool_ChnEng_V5.000.0000001.7.R.20210227.zip
	PlaySDK	General_PlaySDK_Eng_Windows32_IS_V3.043.0000000.2.R.200522.zip
	NetSDK	General_NetSDK_Eng_Linux32_IS_V3.052.0000001.1.R.200514.tar.gz
DSS	DSS PRO	General_DSS-Pro_Win64_IS_V8.000.0000001.0.R.20201215.exe

1.7 Pending Issues

None

1.8 Update Guide

None

41406 da hua 2022-01-26

ZHEJIANG DAHUA VISION TECHNOLOGY CO., LTD.

Address: No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China

Postcode: 310053

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

Website: www.dahuasecurity.com