

DH-IPC-HDBW5442E-Z4E

4MP Pro AI IR Vari-focal Dome Network Camera



System Overview

Pro AI series contains Face Detection, Perimeter Protection and People Counting functions. Powered by deep-learning Artificial Intelligence algorithms, significantly improved accuracy. Meanwhile, the series features starlight and smart IR technology. This series fully protected from dust and water, certified to IP67 and vandal resistant to IK10 standard.

Functions

Face Detection

Face Detection is a software application that automatically captures faces from within a digital image or a video frame from a video source. Dahua cameras use advanced deep learning algorithms and are trained by a large number of face data sources, enabling the camera to locate faces quickly and accurately from the video source and capture facial images.

Face Attributes

Through the use of deep learning algorithms to analyze facial images, Dahua cameras can extract six facial attributes from each frame, including Age, Gender, Expression (Jolly/Surprise/Normal/Rage/Sad/Disgusted/Confused/Frightened), Glasses, Mouth Mask, Moustache & Beard. Customers can acquire data of interest via face attributes statistics.

Perimeter Protection

Dahua's Perimeter Protection functions significantly improved accuracy. Perimeter Protection reduces false alarms and decreases pixel count requirements for object detection. Perimeter Protection features custom tripwires based on object type for automation in limited access areas such as pedestrian or vehicle-only zones. This combination of advanced AI analytics and real-time alerts to a desktop or to a mobile client reduces system requirements and resources resulting in greater surveillance system efficiency.

- 1/1.8" 4Megapixel progressive scan CMOS
- H.265 & H.264 triple-stream encoding
- 25/30 fps@2688 × 1520, 50/60 fps@1080P (1920 × 1080)
- WDR (140 dB), Day/Night (ICR), 3D DNR, AWB, AGC, BLC
- Multiple network monitoring: Web viewer, CMS (DSS/PSS) & DMSS
- 8 mm–32 mm motorized lens
- 1/1 Alarm in/out, 1/1 audio in/out
- Max. IR LEDs Length 80 m
- Micro SD memory, IP67, IK10



People Counting

People Counting function uses advanced image processing technology to capture depth information from within images. The camera pairs this information with deep learning algorithms to analyze and detect human bodies and track target objects in real time. The camera provides statistics for separate individuals' entrance and exit with up to 95% counting accuracy.

Metadata

Metadata is feature attribute information extracted from a target object which can be used for data retrieval. Dahua face detection camera can extract six facial attributes and output the metadata for analysis.

ePoE technology

The ePoE technology of Dahua, designed internally, adopts advanced 2D-PAM3 coding modulation from physical layer, and realizes full duplex transmission over 800 meters at the speed of 10Mbps, or 300 meters at the speed of 100Mbps via Cat 5 or coaxial cable media. Besides, it supports PoE and PoC power supply technology which has greatly simplified construction and wiring. Dahua ePoE technology offer a new way to accomplish long distance transmission between IP camera and network switch. It allows more flexible surveillance system design, improves reliability and saves construction and wiring cost.

Protection(IP67, IK10, wide voltage)

The camera allows for $\pm 30\%$ input voltage tolerance, suitable for the most unstable conditions for outdoor applications. Its 6KV lightning rating provides effective protection for both the camera and its structure against lightning. Subjected and certified to rigorous dust and immersion tests (IP67) and impact tests (IK10), the camera is the choice for installation in even the most unforgiving environments.

Technical Specification					
Camera					
Image Sensor	1/1.8" 4.1MPx CMOS with 8.41µm² pixel size				
Effective Pixels	2688 (H) x 1520 (V)				
Sensor Sensitivity	6390 mV/lux•s, Quantum Efficiency of 60% at 850nm				
RAM/ROM	1 GB/128 MB				
Electronic Shutter Speed	Auto/Manual, 1/3 s–1/100000 s				
Minimum Illumination	0.002 Lux@F1.6				
IR Distance	Distance up to 80 m (262 ft)				
IR On/Off Control	Auto/Manual				
IR LEDs	3 (850nm)				
Lens					
Lens Type	Motorized vari-focal				
Mount Type	Board-in				
Focal Length	8 mm–32 mm				
Max. Aperture	F1.6 - Constant F1.6 throughout the zoom range				
Angle of View	H: 43°–15°, V:23°–8°				
Aperture Type	Auto (HALL)				
Close Focus Distance	2.5 m–6.0 m (8.20 ft–19.69 ft)				
DORI Distance	Lens	Detect	Observe	Recognize	Identify
	W	151m(495ft)	60.7m(199ft)	30.3m(99ft)	15.1m(49ft)
	T	400m(1312ft)	160m(525ft)	80m(262ft)	40m(131ft)
Pan/Tilt/Rotation					
Pan/Tilt/Rotation Range	Pan:0°–355°; Tilt:0°–65°; Rotation:0°–355°				
Artificial Intelligence					
Face Detection	Support face image capture				
Face Attributes	Support 6 kinds of face attributes extraction: Age, Gender, Expression (Jolly, Surprise, Normal, Rage, Sad, Disgusted, Confused, Frightened), Glasses, Mouth Mask, Moustache & Beard				
Perimeter Protection	Tripwire, intrusion (Recognition of vehicle and people), fast moving, loitering detection, parking detection and people gathering				
People Counting	Support Line crossing/Region/Queueing people counting; Support 4 accesses independent detection, 4 areas independent detection				
General Intelligence					
Event Trigger	Motion detection, Video tampering, Scene changing, Network disconnection, IP address conflict, Illegal Access, Storage anomaly				
General Intelligence	Object Abandoned/Missing				
Heat Map	Yes				
Video					
Compression	H.265, H.264, H.264B, H.264H, MJPEG (sub stream)				
Smart Codec	Yes				
Streaming Capability	3 Streams				
Resolution	2688 × 1520/2560 × 1440/2304 × 1296/1080P (1920 × 1080)/1.3M (1280 × 960)/720P (1280 × 720)/D1 (704 × 576/704 × 480)/VGA (640 × 480)/CIF (352 × 288/352 × 240)				
Frame Rate	Main Stream: 2688 × 1520 (1 fps–25/30 fps) 2560 × 1440 (1 fps–25/30 fps) 1920 × 1080 (1 fps–50/60 fps) Sub Stream: D1 (1 fps–25/30 fps) D1 (1 fps–50/60 fps) Third Stream: 1080P (1 fps–16 fps)				
Bit Rate Control	CBR/VBR				
Bit Rate	H.264: 32 Kbps–8192 Kbps H.265: 19 Kbps–8192 Kbps				
Day/Night	Auto (ICR) / Color / B/W				
BLC Mode	BLC/HLC/WDR (140 dB, 3-exposure HDR)/SSA				
White Balance	Auto/Natural/Street Lamp/Outdoor/Manual				
Gain Control	Auto/Manual				
Noise Reduction	3D DNR				
Motion Detection	Off / On (4 Zone, Rectangle)				
Region of Interest	Off / On (4 Zone)				
Electronic Image Stabilization (EIS)	Yes				
Smart IR	Yes				
Defog	Yes				
Flip	0°/90°/180°/270°				
Mirror	Off / On				
Privacy Masking	Off / On (4 Area, Rectangle)				
Audio					
Compression	G.711a, G.711Mu, AAC, G.726, G.723				
Network					
Ethernet	RJ-45 (10/100Base-T)				
Protocol	IPv4;IPv6;HTTP;HTTPS;TCP;UDP;ARP;RTP;RTSP;RTCP;RTMP;SMTP;FTP;SFTP;DHCP;DNS;DDNS;QoS;UPnP;NTP;Multicast;ICMP;IGMP;NFS;PPPoE;802.1x;SNMP				
Interoperability	ONVIF (Profile S/Profile G/Profile T), CGI, Milestone, Genetec, P2P				
Streaming Method	Unicast / Multicast				
Max. User Access	20 Users				
Edge Storage	NAS;FTP;SFTP Micro SD card 256 GB				
Web Viewer	IE (versions newer than IE8), Chrome, Firefox, Safari (versions newer than Safari 12)				
Management Software	Smart PSS, DSS, DMSS				
Smart Phone	iOS, Android				
Certifications					
Certifications	CE-LVD: EN60950-1 CE-EMC: Electromagnetic Compatibility Directive 2014/30/EU FCC: 47 CFR FCC Part 15, Subpart B UL/CUL: UL60950-1 CAN/CSA C22.2 No.60950-1-07				

Interface

Audio Interface	1/1 channel In/Out
RS485	N/A
Alarm	1 channel In: 5mA 5V DC 1 channel Out: 300mA 12V DC

Electrical

Power Supply	DC 12V (±30%), AC 24V (±30%), PoE (802.3af) (Class 0), ePoE (up to 800m)
Power Consumption	<12.4W

Environmental

Operating Conditions	-30° C to +60° C (-22° F to +140° F)/Less than 95% RH
Storage Conditions	-30° C to +60° C (-22° F to +140° F)
Ingress Protection	IP67
Vandal Resistance	IK10

Construction


Casing	Metal
Dimensions	Φ159.0 mm × 117.9 mm (6.26" × 4.64")
Net Weight	0.95 kg (2.09 lb)
Gross Weight	1.20 kg (2.65 lb)

Ordering Information

Type	Part Number	Description
4MP camera	DH-IPC-HDBW5442EP-Z4E	4MP Pro AI IR Vari-focal Dome Network Camera, PAL
	DH-IPC-HDBW5442EN-Z4E	4MP Pro AI IR Vari-focal Dome Network Camera, NTSC
	IPC-HDBW5442EP-Z4E	4MP Pro AI IR Vari-focal Dome Network Camera, PAL
	IPC-HDBW5442EN-Z4E	4MP Pro AI IR Vari-focal Dome Network Camera, NTSC
Accessories (optional)	PFA138	Junction Box
	PFB210W	Wall mount
	PFB300C	Ceiling mount
	PFA152-E	Pole mount
	PFA101	Mount adapter
	PFB201C	In-ceiling mount

Accessories

Optional:

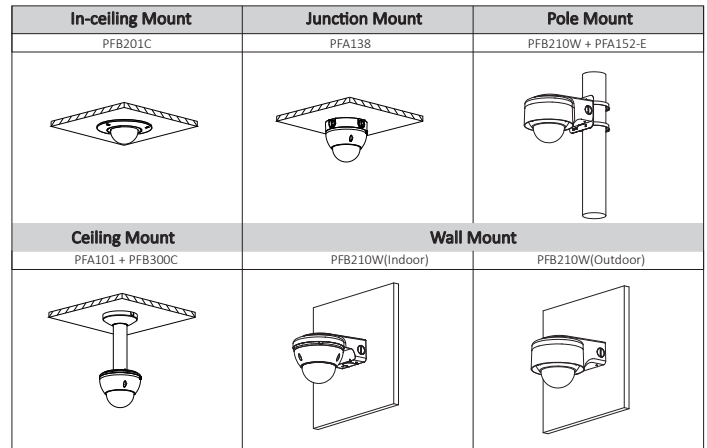

Dimensions (mm[inch])

